



1. Material/Plated
 - 1.1 Stem:Rubber,white
 - 1.2 Cover:Stainless steel
 - 1.3 Contact:Stainless steel,Silver Plated
 - 1.4 Terminal:Stainless steel,Silver Coating
 - 1.5 Case:PA6T,Black
2. Electrical Performance
 - 2.1 Rated Voltage: 12V AC
 - 2.2 Rated Current: 50mA
 - 2.3 Contact Resistance: 100m Ω Max.
 - 2.4 Insulation Resistance: 100M Ω Min.
 - 2.5 Dielectric Strength: 250V AC
3. Mechanical Performance
 - 3.1 Operating Force: See The table
 - 3.2 Travel: 0.40±0.20mm
 - 3.3 Durability: 100,000 Cycles
4. Operating Temperature: -25° C To +85° C

MODEL NO.	"H" (mm)	FORCE
TD-20UA-*	2.6mm	T: 100gf
TD-20UC-*	3.4mm	V: 130gf
TD-20UD-*	4.3mm	X: 160gf
TD-20UE-*	5.1mm	E: 200gf
		Z: 250gf



SCHEMATIC

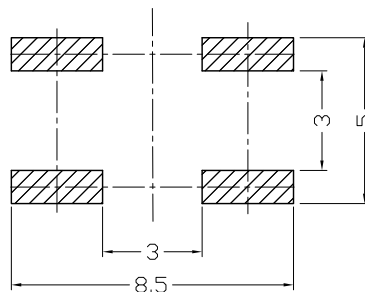

P. C. B LAYOUT

REV.	DESCRIPTION	ECN NO.	NAME	DATE	DRAWN	Tom	2019-06-05	DIMENSION TOLERANCE X X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°	东 莞 市 实 邦 电 子 有 限 公 司 IDSTRB ELECTRONC CO., LTD	TITLE	TACT SWITCH
A	NEW RELEASE		Tom	2019-06-05	CHECKED	Ango	2019-06-05			UNIT: mm	PART NO.
REVISIONS					SCALE: N/A	SHEET: 1 OF 1		LEVEL	XXX	DWG. NO.	